





The software Tuning S has the purpose to simplify and upgrade the control of the PTZ camera in a cost effective and intuitive way.



The software is able to store different single or multiple shot positions and to recall them in alinear and smooth way with all the axis synchronized.

Thumbnail picture storage, multiple pages, cell coloring and name texts are used to facilitate the user to choose at glance the correct shot to play.

Fully integrated with Tecnopoint Tuning and Starter robotic equipment, TuningS software can perform complex sequence movements using keyframe techniques with the option to create multiple time-based loops.

Third-party clients can connect and instruct TuningS to operate, storing and recalling preset single shots or complex sequences using simple configurable TCP/IP commands. When used with Tecnopoint Tuning and Starter robotic equipment, fully synchronized and comprehensive VR/AR Free-D data flow is generated for all the involved axis either for straight or curved tracks.

TuningS is fully integrated with Panasonic remote control RP series: the rocker on the joystick control can be used to drive the dolly or the column of Tuning and Starter robotic equipment.








Features:

- -TuningS has the best performance with the Panasonic PTZ cameras and It can work most of the Sony, Canon and JVC PTZ cameras (*).
- -Up to 8000 shots be stored and each one can be composed of up to 20 keyframes.
- -10 cameras (5 stand alone + 5 installed on Techopoint dollies or columns) or 20 cameras (10 stand alone + 10 installed on Techopoint dollies or columns) version available.
- -Software "Virtual stick" can be used to control the camera and the robotics equipment.

Basic layout:

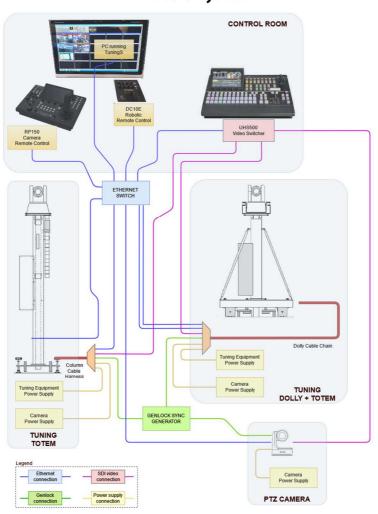

(*) List of supported cameas:

Panasonic: AW-HE40, AW-HN40, AW-HN38, AW-HE60, AW-UE70, AW-HE120, AW-HE130, AW-HN130, AW-HR140, ROBYD1, AW-UE150, AW-UE100, AW-UE40, AW-UE50, AW-UE80, AW-UE160

Sony: SRG-X400, BRC-H800, BRC-1000, ILME-FR7

JVC: KY-PZ400

Canon: CR-N300, CR-N500, CR-N700

Due to some hardware limitations, not all the feature of TuningS software are available for all the cameras listed

Tecnopoint reserves the right to make technical and dimensional changes to the presented products without prior notice. 2/2